

Wax/Resin Ribbon SY-M

It offers a great print quality at low temperature levels, with high speeds of up to 250mm/sec. It offers excellent print quality, especially on paper and metallized coated papers.

Print Head Type

Flat Head

Applications

Shipping labels, inventory labels, general ticketing, retail labels and tags, pharmaceutical labels, hospital use labels, flexible packaging, price tags etc.

Recommended substrates

Coated papers, uncoated papers, gloss paper, synthetic papers, tags, various types of film, PET label, nylon.

Contact

phone [+ 55 11] 4161 8800
email vendas.syp@beontag.com

www.syntpapper.com.br





technical specifications

Wax/Resin Ribbon SY-M

Recommended Substrates	
Nylon	★ ★ ★
Synthetic papers	★ ★ ★ ★ ★
Coated papers	★ ★ ★ ★ ★
Uncoated papers	★ ★ ★ ★ ★
Gloss paper	★ ★ ★ ★ ★
Paper tags	★ ★ ★ ★ ★
Various types of film	★ ★ ★
PET labels	★ ★ ★

Ribbon Specifications	
Black coating	Silicone based
Film thickness	0,0045mm +/- 0,0005
Ribbon Thickness	0,0084mm +/- 0,0005
Paint type	Wax / Resin
Ink melting point	68°C

Typical Compliance	
REACH-SVHC free	
RoHS – Restriction for Certain Hazardous Substances Halogen Free	
TSCA – Control of toxic substances	

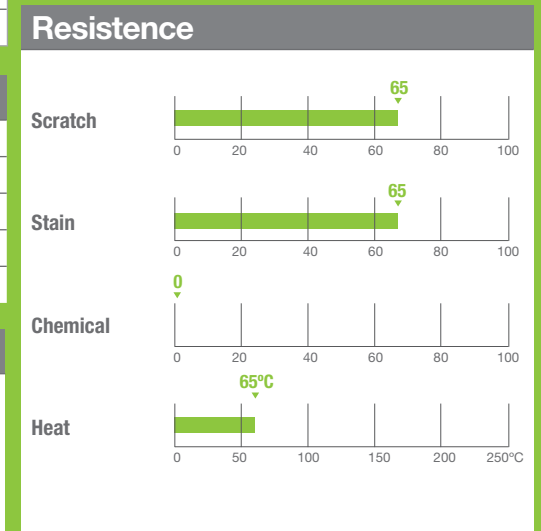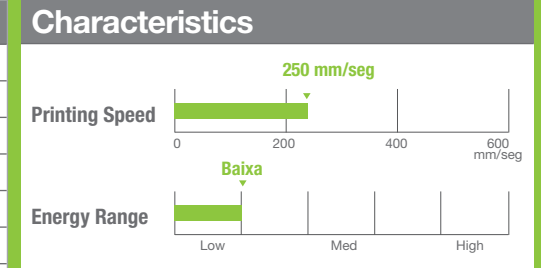

Expiration Date of the Product:

6 months after the invoice date.

